



MH2500 Mini Dome Camera



Main Features

- ◆ 2.0M pixel CMOS
- ◆ 2.8\3.6MM optional
- ◆ Easy to assemble and install, lockable angle and anti-vibration design
- ◆ Perfect solutions for vehicle monitoring, bus, coach, tipper, van, road sweeper, fuel tanker

Overview

Angeltrax camera housing is made of metal and built to survive in rugged and vandal susceptible environments. Vibration and thermal tested, the powerful camera is an excellent choice for various mobile environments. Utilizing the Sony CMOS imaging sensor, it provides outstanding image quality in both day and night lighting conditions. Besides, it also included an integrated Microphone which is able to captures clear audio.



Specification

Model	MHD2500 (AHD 1080P)
CMOS	1/2.9" 2M pixel CMOS
Resolution	1920H*1080V
Format	NTSC/PAL
Minimum illumination	0.1Lux(IR off) /0Lux (IR on) F1.2
IR distance	5~8m
S/N	≥ 45dB
Lens	2.8, 3.6mm M12(Optional)
FOV	2.8mm H*V 90*47°
	3.6mm H*V 81*42°
Video output	1.0Vp-p AHD video output 75 Ω, 4pin DIN JACK
Audio	Built-in mic
Power	DC12V± 10%
Consumption(Max.)	120mA/DC12V ±5%
Working temperature	-40°C ~+ 70°C
Dimension	69(W)*55.5(H)mm
Weight	About 168g

Specifications, features and applications of use are subject to change without notice.



Dimension (Unit: mm)

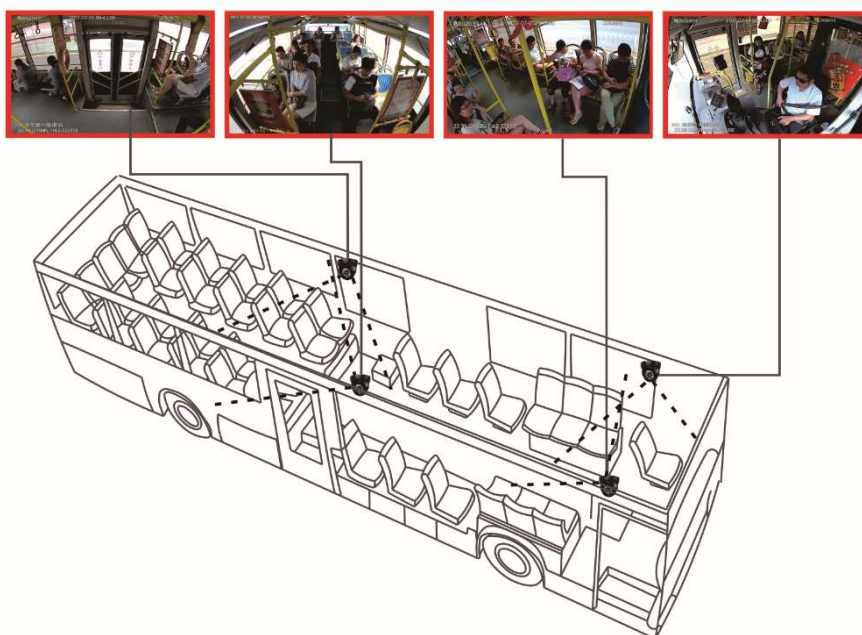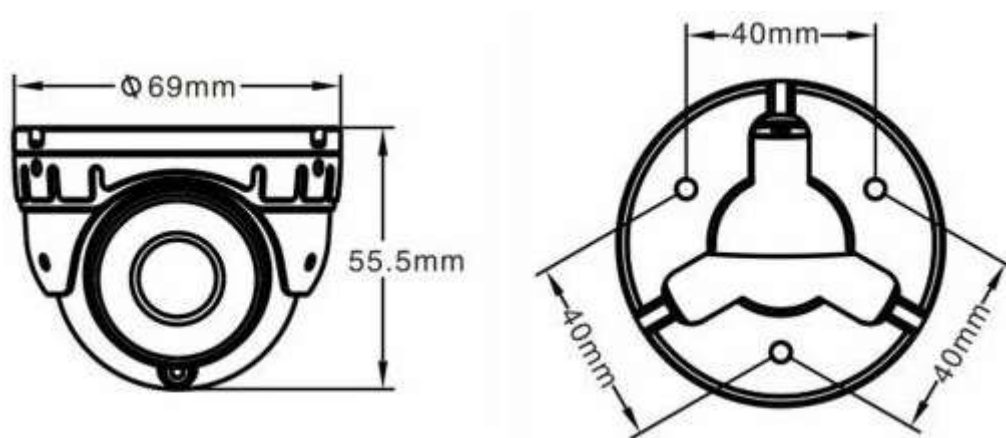

Specifications, features and applications of use are subject to change without notice.